

FLYTECH

K669N3

19" Self-Checkout Kiosk



Windows

Linux




Android 13



KEY FEATURES:

- Integrated with Intel® Alder Lake-N and Meteor Lake processors
- Compatible with Windows, Linux, and Android operating systems
- 19" PCAP touchscreen for enhanced customer experience
- Comprehensive range of peripheral and accessory options
- Easy access to the motherboard box for service and maintenance
- Space-saving footprint to fit easily into any retail environment

DIMENSIONS

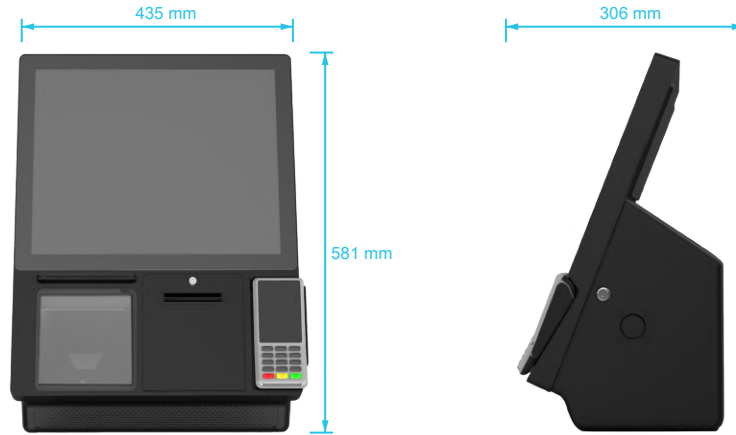

SPECIFICATIONS

	Motherboard	G35	G75U
System	Processor	Intel® Alder Lake N: N97, i3-N305	Intel® Meteor Lake Core Ultra 5 125U
	Memory	8GB DDR4	8GB DDR5
	Storage	128GB SSD (M.2)	128GB SSD (M.2)
Display	Size and Resolution	19" 1280 x 1024	19" 1280 x 1024
	Touch Screen	True-Flat PCAP multi-touch	True-Flat PCAP multi-touch
I/O Ports	USB Type-A	2 x USB3.0, 4 x USB2.0	4 x USB3.0, 2 x USB2.0
	USB Type-C	1 x USB3.0 full-functioned (DP/PD 5V/3A, 12V/3A)	1 x USB3.0 full-functioned (DP/PD 5V/3A, 12V/3A)
	FeDP	2 x Flytech proprietary miniDP (1 for main display, 1 for 2nd display)	2 x Flytech proprietary miniDP (1 for main display, 1 for 2nd display)
	Serial Port	3 x RJ48 (standard RS232) (default 0V; 5V,12V)	3 x RJ48 (standard RS232) (default 0V; 5V,12V)
	LAN	1 x RJ45	1 x RJ45
	Cash Drawer	1 x RJ11	1 x RJ11
	DC Jack	1 x 4PIN (with latch)	1 x 4PIN (with latch)
	Power Button	1	1
Audio	Speaker	1 x 3W	1 x 3W
Power	Power Supply	65W/19V	120W/19V
Communication	WLAN+BT	802.11 series + BT5.0 (Option)	802.11 series + BT5.0 (Option)
Peripherals (option)	RFID	RFID Reader (USB)	RFID Reader (USB)
	MSR	3-Track MSR (USB)	3-Track MSR (USB)
	iButton	iButton (USB)	iButton (USB)
	Camera	5MP Camera (on main display) / 2MP Camera (on top pole)	5MP Camera (on main display) / 2MP Camera (on top pole)
	Light Bar	Light Bar Module (on top of the display)	Light Bar Module (on top of the display)
	2nd Display	11.6" 2nd display	11.6" 2nd display
	Scanner	Supported Honeywell 7990G, Datalogic M3450VSi, SuperLead 72CJ/7801	Supported Honeywell 7990G, Datalogic M3450VSi, SuperLead 72CJ/7801
	Printer	Supported Epson® TM-M30III, TM-T88VI, TM-T88VII, HPRT TP808	Supported Epson® TM-M30III, TM-T88VI, TM-T88VII, HPRT TP808
	Payment Device	Supported Verifone P400, Ingenico LANE 3000/3600 (payment bracket only)	Supported Verifone P400, Ingenico LANE 3000/3600 (payment bracket only)
	Top Pole	Top Pole Module (with LED light)	Top Pole Module (with LED light)
	Mounting Kit	Wall-mount kit, Counter mount kit, Floor stand kit	Wall-mount kit, Counter mount kit, Floor stand kit
Certificate	Certificate	FCC Class A, CE Mark Class A, LVD	FCC Class A, CE Mark Class A, LVD
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing	20% ~ 85% RH non-condensing
Dimensions	W x H x D	435 x 581 x 306 mm (17.1" x 22.8" x 12")	435 x 581 x 306 mm (17.1" x 22.8" x 12")
Weight	Weight (w/o Accessory)	13kg (28.66 lbs)	13kg (28.66 lbs)
OS Supported		Windows 10 IoT Enterprise, Linux, Android 13.0	Windows 10 IoT Enterprise, Linux, Android 13.0

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※

Taiwan - Headquarters

No.168, Sing-ai Rd., Neihu District,
Taipei City 11494, Taiwan, R.O.C.
 886-2-8791-4988
 886-2-8791-4966
 sales@flytech.com
www.flytech.com

U.S.A. - California

271 East Brokaw Road, San Jose,
CA 95112, U.S.A.
 1-510-257-5180
 1-510-257-5181
 sales.america@flytech.com

China - Shanghai

3F Building 39, No. 333 Qin Jiang Rd.,
Shanghai 200233, P.R.China
 86-21-5426-1555
 86-21-5426-1001
 sales@flytech.com.cn
www.flytech.com.cn

China - Hong Kong SAR

Rm01, 6/F, Blk A, Tonic Industrial Centre,
26 Kai Cheung Road, Kowloon Bay,
Kowloon, Hong Kong.
 852-3525-5800
 852-2751-7447
 sales@flytech.com.hk

